

Pressure Balance Valve with Diverter

FEATURES

- Corrosion resistant
- Anti-scald valve
- Adjustable temperature limit stop
- Two way diverter
- Integral shut-offs / check valves
- 1/2" NPT / sweat connections
- Back-to-back installation compatible without cross-over piping
- Optimized for minimum flow rate of 1.5 gpm (5.7 lpm) or higher.

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION


Pressure balancing valve with diverter shall have anti-scald protection and an adjustable temperature limit stop. Valve shall have integral shut-offs / check valve. Valve shall have top and side outlet ports. Valve shall have sweat solder connections with included 1/2" NPT adapters on outlets. Valve shall have 1/2" NPT / sweat solder connections on inlets. Valve model shall be TSPVM. Requires trim for pressure balance valve with diverter (sold separately).

TSPVM

Pressure Balance Valve with Diverter

SPECIFICATIONS


Recommended Operating Pressure	20 psi - 80 psi
Warranty	Lifetime Limited Warranty (Residential Use) One Year (Commercial Use)
Material	Brass
Shipping Weight	4.4 lbs.
Shipping Dimensions	11.5" L x 8.7" W x 5.9" H

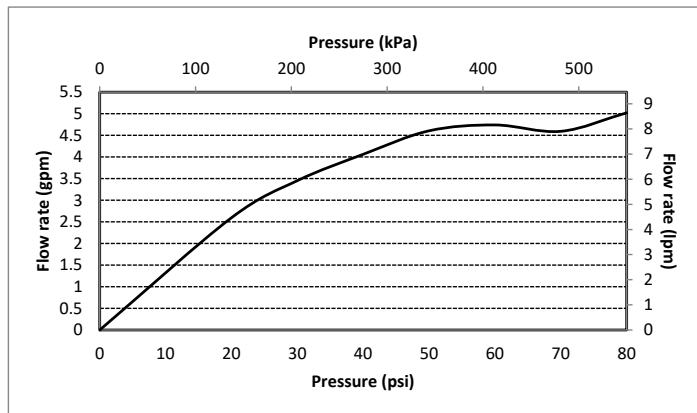

INSTALLATION NOTES


TRIM REQUIRED:

Pressure balance with diverter trim sold separately.

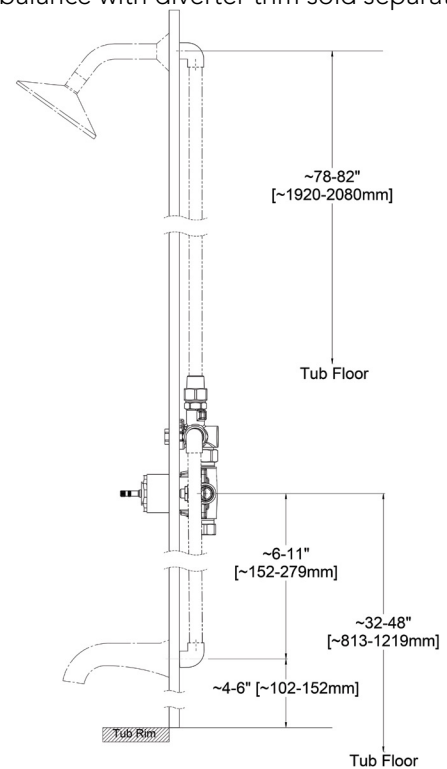

Dashed Pipework and Components Not Included

DIMENSIONS

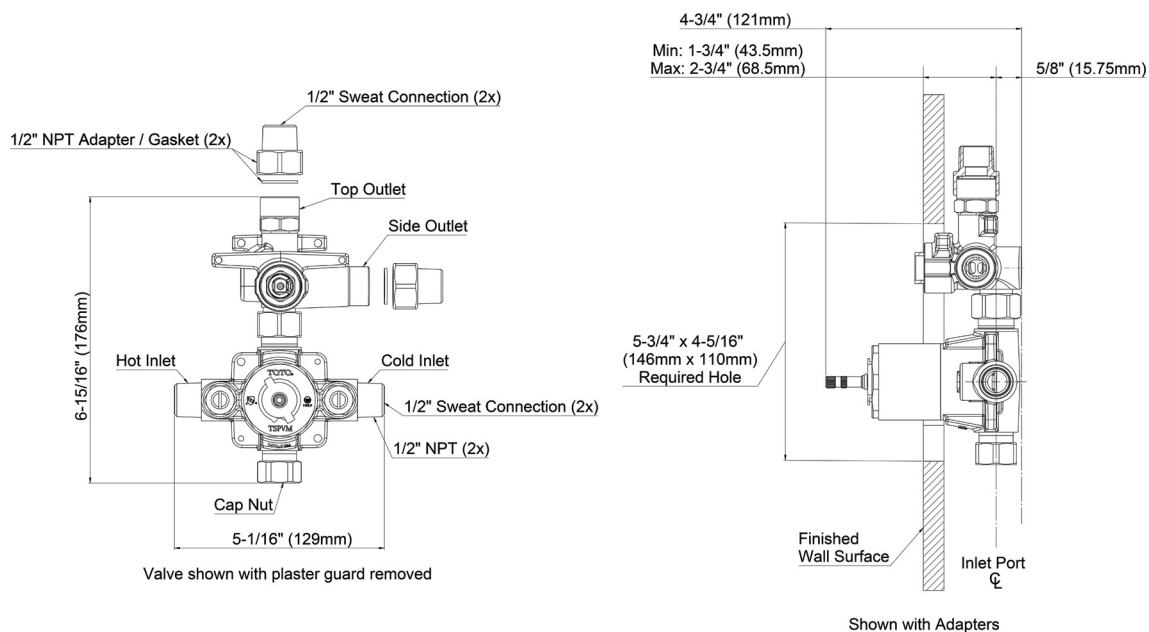

TOTO

These dimensions and specifications are subject to change without notice